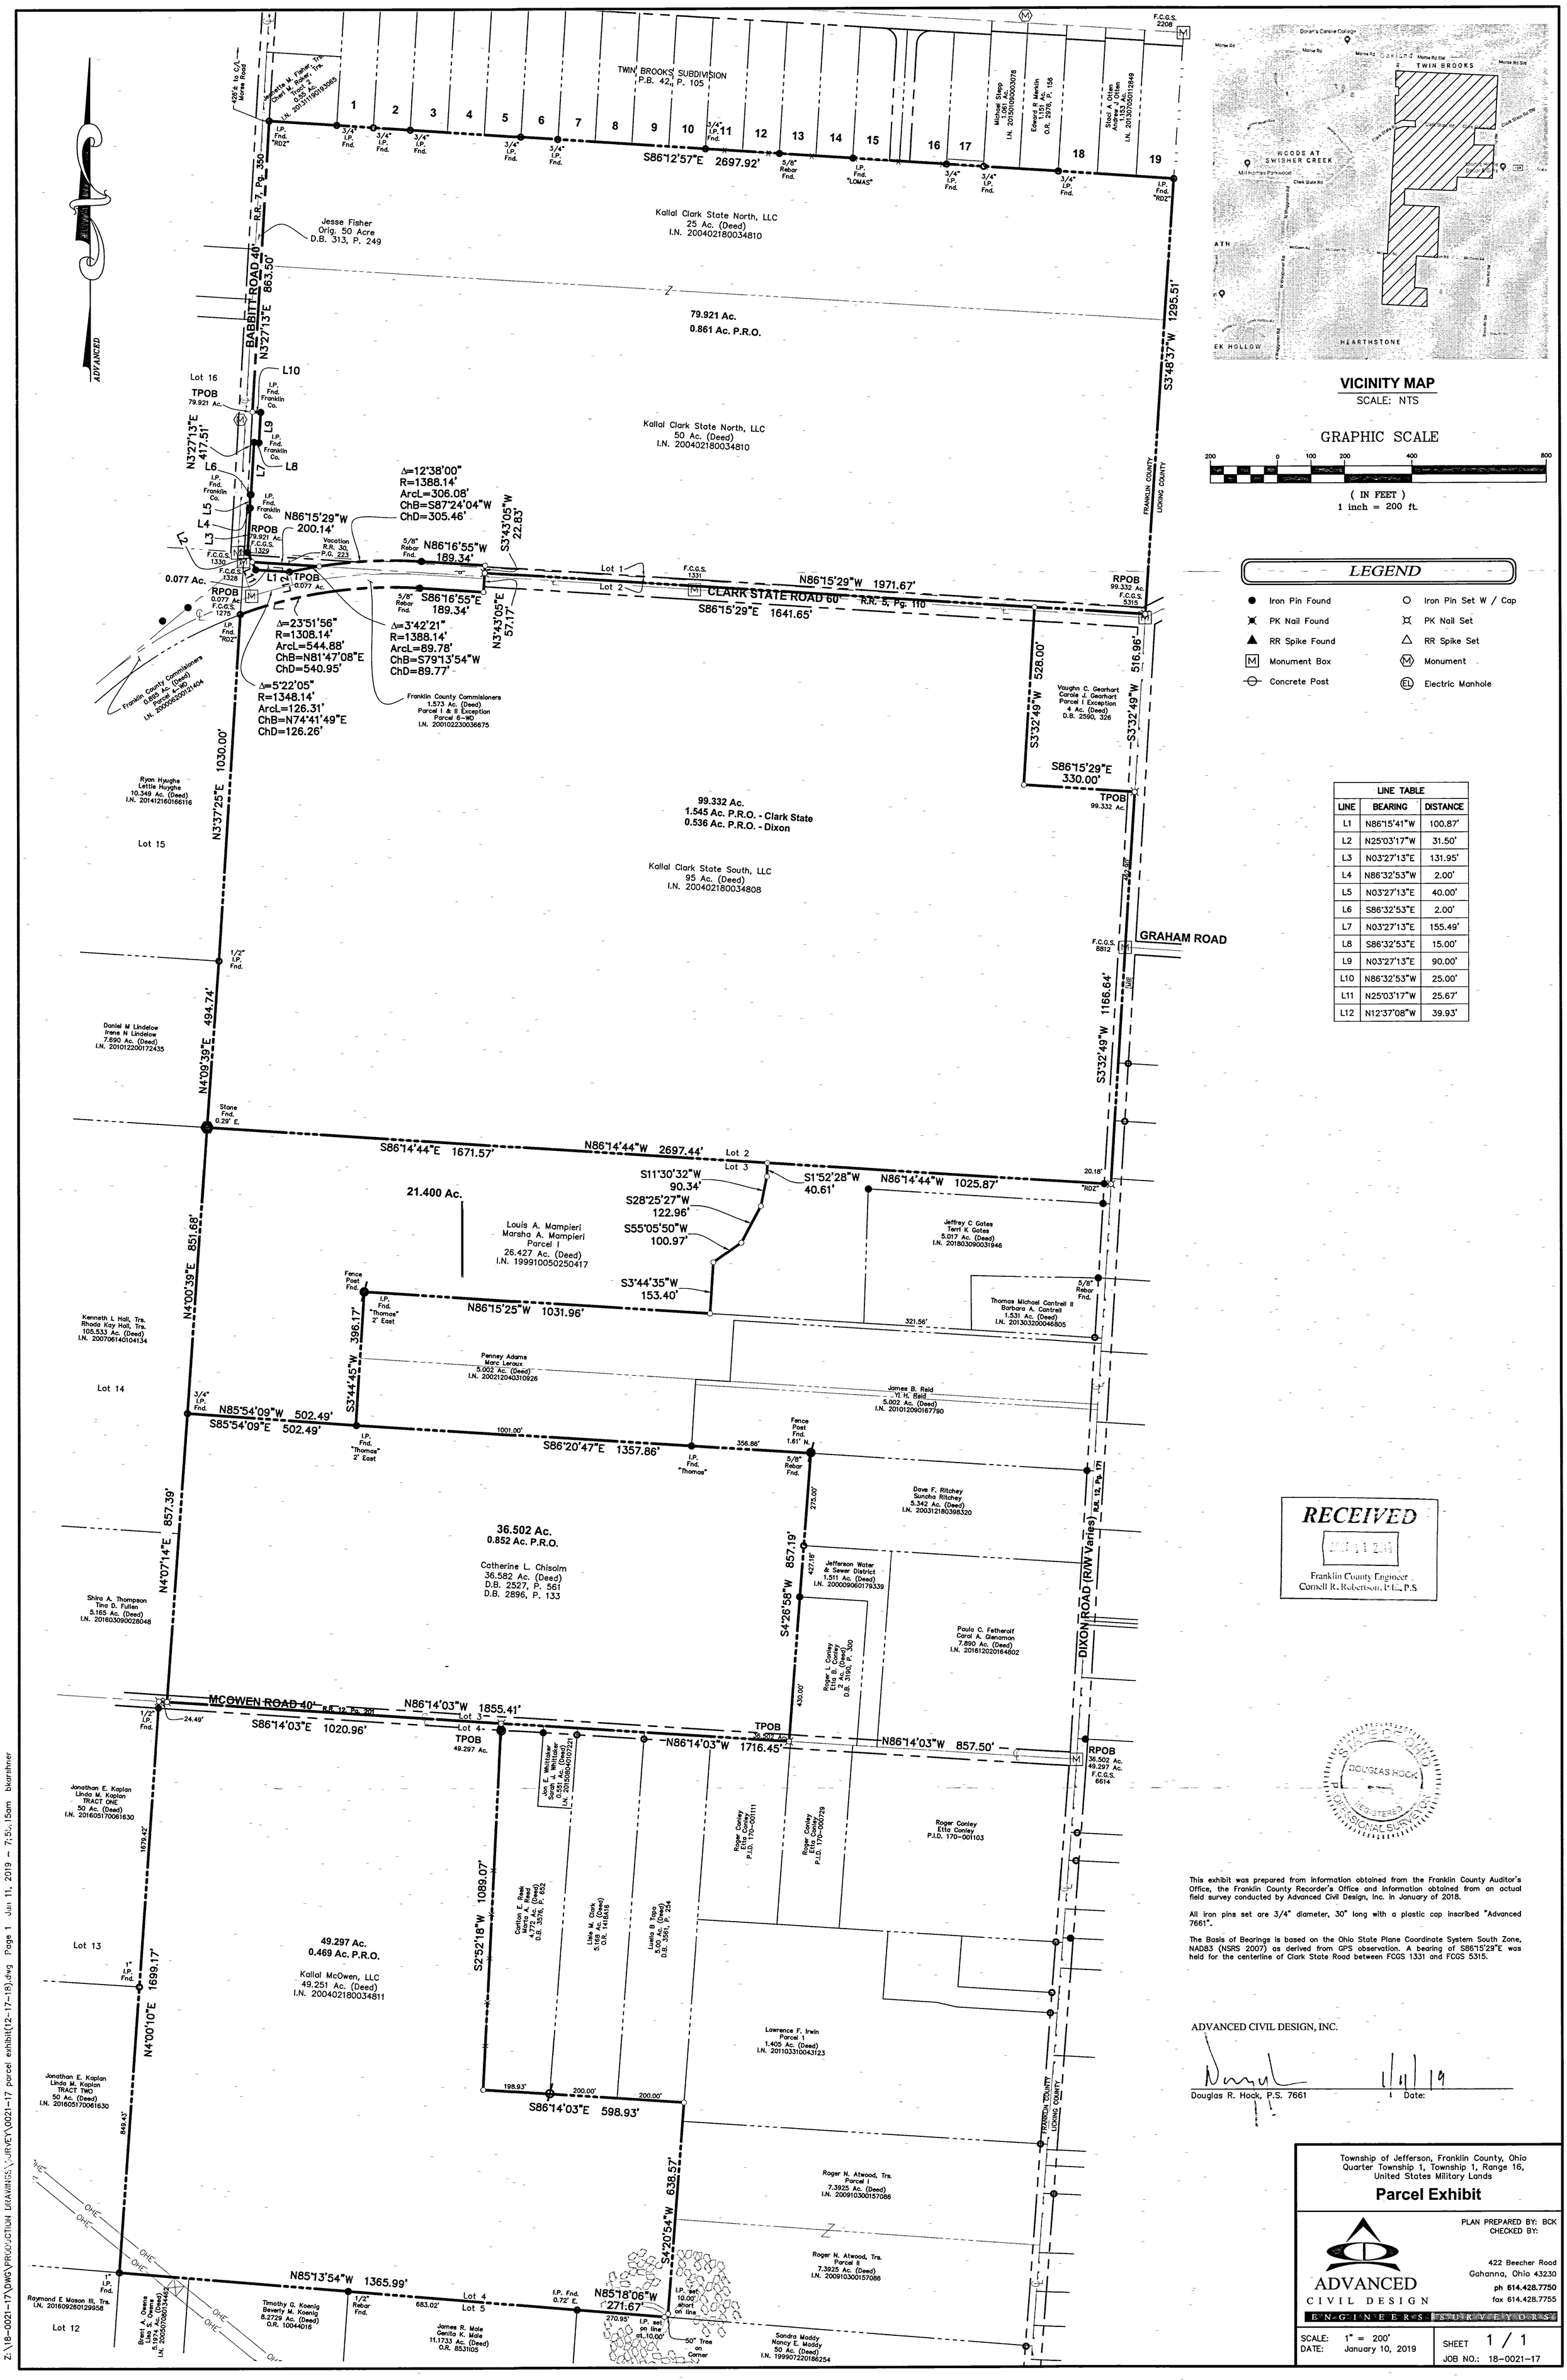

LINE TABLE		
LINE	BEARING	DISTANCE
L1	N86°15'41"W	100.87'
L2	N25°03'17"W	31.50'
L3	N03°27'13"E	131.95'
L4	N86°32'53"W	2.00'
L5	N03°27'13"E	40.00'
L6	S86°32'53"E	2.00'
L7	N03°27'13"E	155.49'
L8	S86°32'53"E	15.00'
L9	N03°27'13"E	90.00'
L10	N86°32'53"W	25.00'
L11	N25°03'17"W	25.67'
L12	N12°37'08"W	39.93'

This exhibit was prepared from information obtained from the Franklin County Auditor's Office, the Franklin County Recorder's Office and information obtained from an actual field survey conducted by Advanced Civil Design, Inc. in January of 2018.

All iron pins set are 3/4" diameter, 30" long with a plastic cap inscribed "Advanced 7661".

The Basis of Bearings is based on the Ohio State Plane Coordinate System South Zone, NAD83 (NSRS 2007) as derived from GPS observation. A bearing of S86°15'29"E was held for the centerline of Clark State Road between FCGS 1331 and FCGS 5315.

ADVANCED CIVIL DESIGN, INC.

Douglas R. Hock, P.S. 7661 Date: 1/11/19

Township of Jefferson, Franklin County, Ohio
Quarter Township 1, Township 1, Range 16,
United States Military Lands

Parcel Exhibit

ADVANCED CIVIL DESIGN
ENGINEERS SURVEYORS

PLAN PREPARED BY: BCK
CHECKED BY:

422 Beecher Road
Gahanna, Ohio 43230
ph 614.428.7750
fax 614.428.7755

SCALE: 1" = 200'
DATE: January 10, 2019

SHEET 1 / 1
JOB NO.: 18-0021-17

Z:\18-0021-17\DWG\PRODUCTION DRAWINGS\SURVEY\0021-17 parcel exhibit(12-17-18).dwg Page 1 Jan 11, 2019 - 7:54:15am bkarshner