# SURVEY OF ACREAGE PARCEL

## LOT 23, SECTION 12, QUARTER TOWNSHIP 1, TOWNSHIP 2, RANGE 16
## UNITED STATES MILITARY DISTRICT
## CITY OF NEW ALBANY, COUNTY OF FRANKLIN, STATE OF OHIO

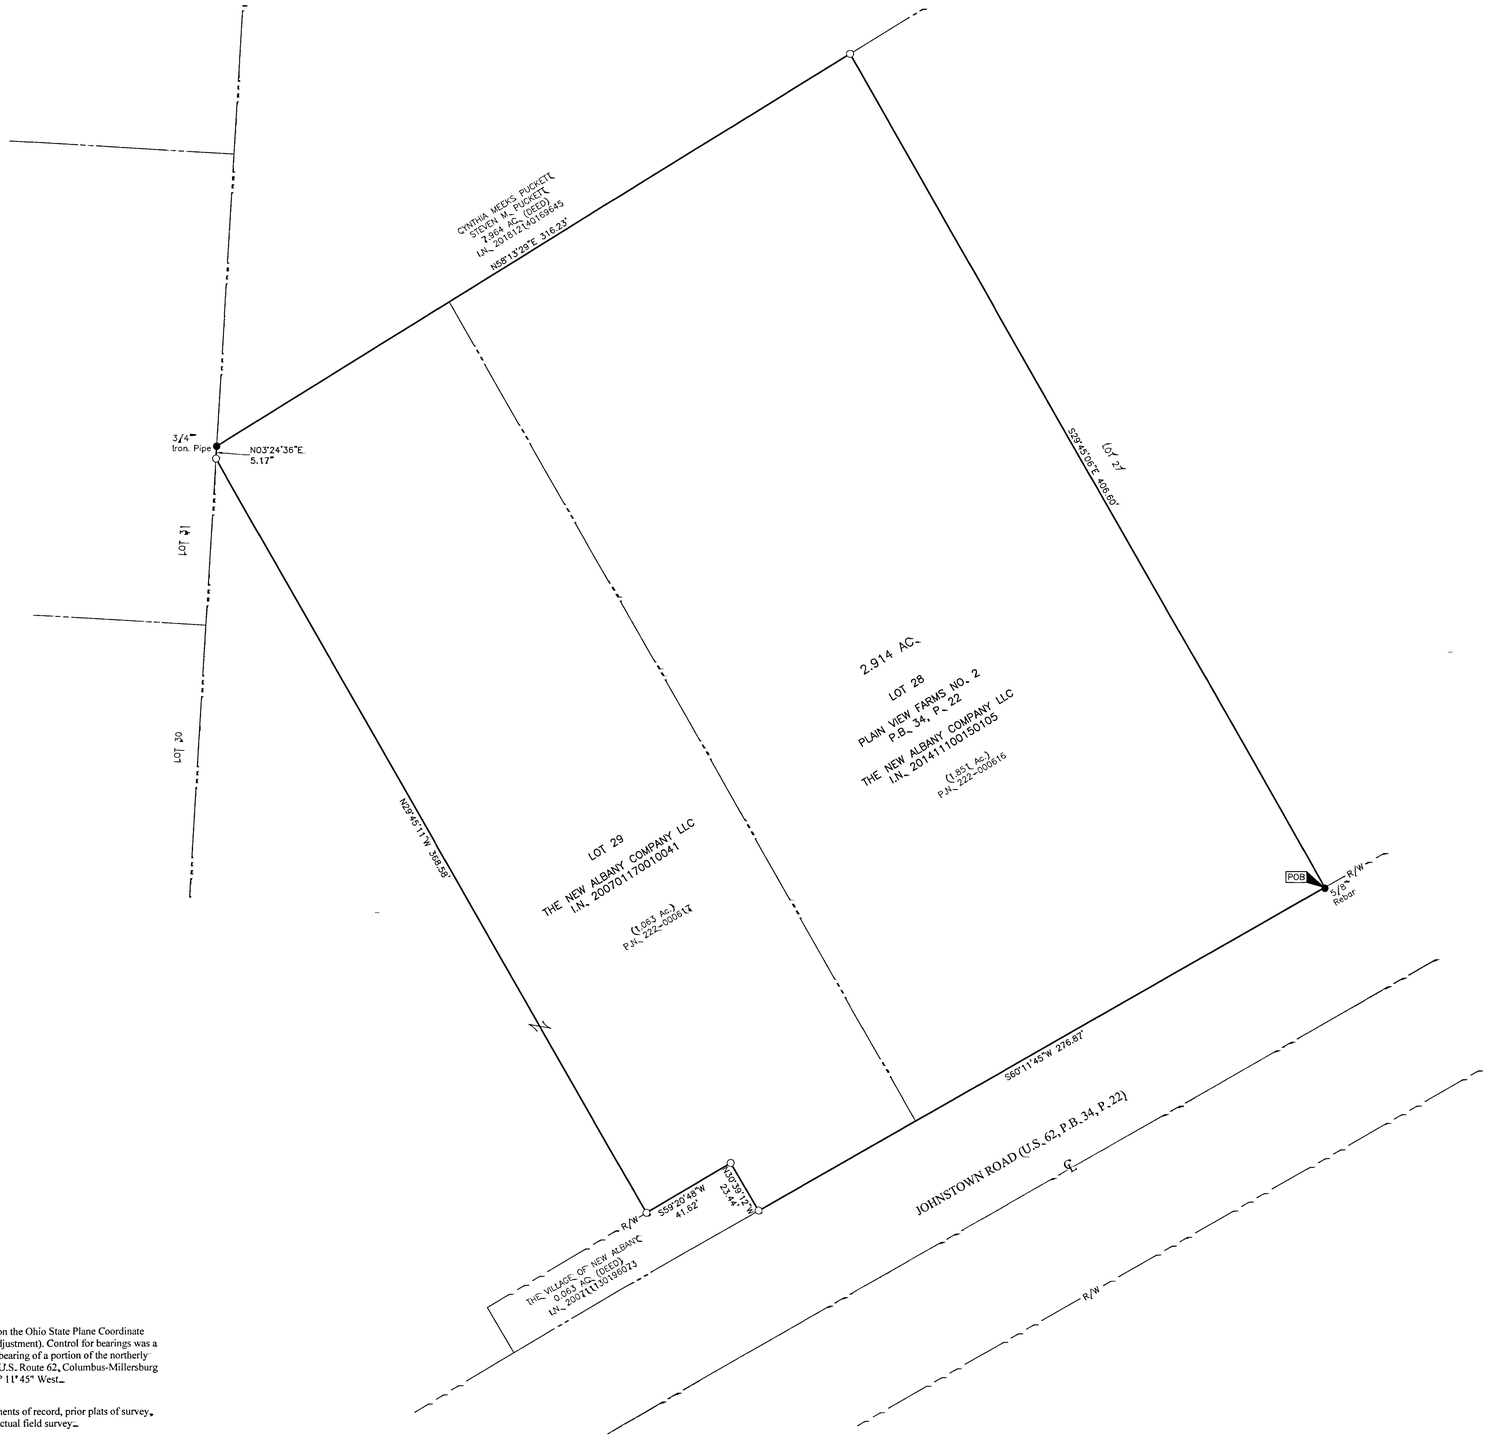


RECEIVED
MAR 06 2020
Franklin County Engineer
Cornell R. Robertson, P.E., P.S.

By: Matthew A. Kirk 5 MARCH 20
Matthew A. Kirk Date
Professional Surveyor No. 7865

- ○ = STONE FND.
- ■ = MON. FND.
- ● = I.P. FND.
- ○ = I.P. SET
- ● = MAG. NAIL FND.
- ○ = MAG. NAIL SET
- ▲ = R.R. SPK. FND.
- △ = R.R. SPK. SET
- ⬟ = P.K. NAIL FND.

I.P. Set are 13/16" I.D. iron pipes 30" long with cap inscribed EMHT INC.

30 0 30 60
GRAPHIC SCALE (in feet)

BASIS OF BEARINGS:
The bearings shown hereon are based on the Ohio State Plane Coordinate System, South Zone, NAD83 (1986 Adjustment). Control for bearings was a control traverse which determined the bearing of a portion of the northerly right-of-way line of Johnstown Road (U.S. Route 62, Columbus-Millersburg Road) as having a bearing of South 60° 11' 45" West.

SURVEY NOTE:
This survey was prepared using documents of record, prior plats of survey, and observed evidence located by an actual field survey.

EMHT
Evans, Mechwart, Hambleton & Tilton, Inc.
Engineers • Surveyors • Planners • Scientists
5500 New Albany Road, Columbus, OH 43054
Phone: 614.775.4500 Toll Free: 888.775.3648
emht.com

Date: March 5, 2020
Scale: 1" = 30'
Job No: 2019-0866
Sheet: 1 of 1

REVISIONS

| MARK | DATE | DESCRIPTION |
|---|---|---|
| | | |

Skilken Gold Site ALTA / 20190866 VS RNDW